

WPR LED LUMINAIRE



IP65 



The WPR Led IP65 luminaire is designed to meet the highest of specifications and utilises the latest in both led technology and optics. The polycarbonate housing incorporates specifically designed linear led boards with an opal, reeded diffuser to eliminate hot spots and glare. The use of passive cooling technology produces good thermal management performance with excellent efficiency results.

Various lumen outputs are available and two colour temperatures making the fixtures suitable for most industrial applications.

The range is enhanced with various options including dimmable drivers, integral self-contained emergency, monitor self-test emergency and Dali Em-pro emergency.

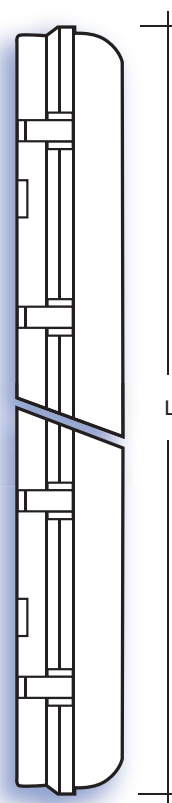

Part No	Lumen output	Power (W)	CCT	L	B	H	Weight Kg	Clips
WPR/14/4	2640	28	4000	1289	114	108	2.1	14
WPR/14/3	2560	28	3000	1289	114	108	2.1	14
WPR/15/4	3270	35	4000	1589	114	108	2.5	16
WPR/15/3	3170	35	3000	1589	114	108	2.5	16
WPR/24/4	5280	55	4000	1289	170	109	2.9	14
WPR/24/3	5120	55	3000	1289	170	109	2.9	14
WPR/25/4	6540	68	4000	1589	170	109	3.4	16
WPR/25/3	6340	68	4000	1589	170	109	3.4	16

Options

For Self Contained Emergency suffix **/EMR**

For Monitor self test Emergency suffix **/MON**

For Dali Emergency suffix **/EMP** For Dimmable suffix **/DIMM**

For Stainless Steel Clips suffix **/SS**

50,000 hours life span (L70)